


How to Fit Venetian Blinds

In the box

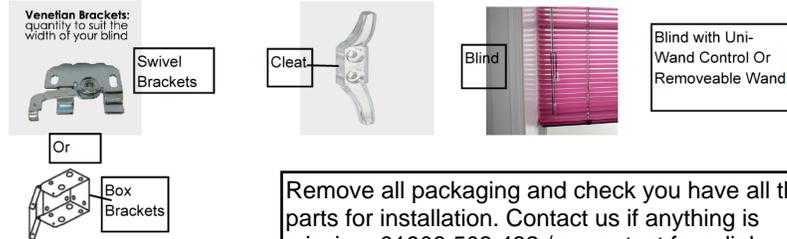

Remove all packaging and check you have all the parts for installation. Contact us if anything is missing. 01908 503 482 / or contact form link.


Swivel Bracket Fitting

<http://www.meritblinds.co.uk/contact.html>


Tip Tilt the head rail towards you to check for the wand control or cords. You will need to leave 50 mm at either end of the wand or ladder/cord controls. (**Swivel Bracket**)

NB To meet the blinds safety regulations, your head rail must installed not less than 1500 mm/ 1.5 meters/ 4.92 feet from the floor.

Decide where you are going to fit the blind.

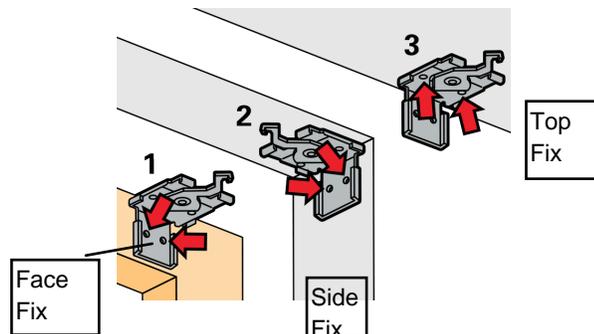

Attach the swivel brackets along the width of the head rail spacing them out evenly and avoiding any cord /ladder strings or wand controls. Use the diagram below as a guide.

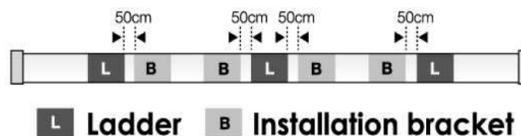

NB Attach the brackets by turning the lever / swinging arm clockwise. Tilt the bracket so that it slides under the inside of the head rail. Lock by turning lever to the left.

Check the depth of any handles or obstructions

Offer the head rail to the window where you plan to fit and mark the bracket positions.


Drill holes and use any appropriate Rawl plugs and screws.

Take off the brackets by moving the leavers over to the right and reversing actions to put them on.

Screw the brackets into position.


Offer the head rail up to the brackets hooking the front of the head rail onto the front of the brackets.

Twist the head rail backwards so it locates into the back of the bracket.



Turn the lever to the left so that it locks into position.

Box Fixing Brackets- Often used on Wooden Venetian Blinds



These brackets come in pairs a left and right hand bracket. and if a window is wide, support brackets will be supplied. The brackets have a multiple fixing points. Squeeze the front edges to open the front flap.

Decide where you are going to fit the blind. Take any obstacles into account. Side fitting is useful, but other options are possible depending upon your window.

NB The head rail must be installed not less than 1.5 meters from the floor for blinds safety.

Mark out holes and drill.*


***Tip Be careful with the chuck of the drill if drilling in the recess ceiling.**

Fit the Rawl plugs and the brackets in place.

***Tip Be careful when fitting the support brackets not to place them in positions that could interfere with the cord lock/ cord or ladder.**

Attach any pelmet clips if any are supplied onto the head rail.


Slide the blind into place so that it fits into the brackets. Close the flap on either side.

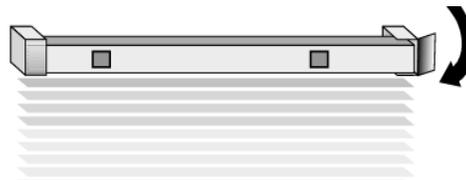

If no clips are supplied the blind will come with Velcro.


Take off the pieces the Velcro and attach the Pelmet/ Fascia.

Blinds Safety Breakaway Condenser

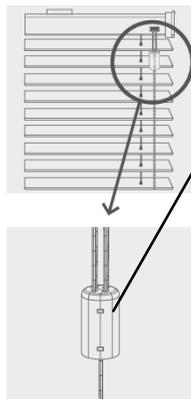


The blind is fitted with a breakaway condenser. If the cord is pulled too hard, the condenser breaks apart.

How to Put The Breakaway Condenser Back Together




If there are two cords, press the each side of the condenser together until they click back together.



If there are three cords, put them into on one side of the condenser and close.

If there are four cords, place one cord on one side of the condenser and the other cords on the side, Close the condenser.

How To Operate Your Blind/s



Tilting the slats is achieved by on either cord. One will open and the other will close the slats.

Always lift or lower the blind with the slats in the open position.

To lower the blind, move the cord across the face of the blind and the cord lock will release.

To lift the blind pull the cords down until you get to the desired position.

If Breakaway condenser is not fitted then safety cleat/ needs to be installed. Two will be supplied for longer blinds.



This needs to be fitted at least 1.5 meters from the floor. Cord need to wrapped around in a fig

Additional Safety Considerations

Keep all beds, cots, highchairs or furniture away from any blind cords and chains.

If any cords or chains are installed always ensure that any safety device are always used and that they are out of the reach of children.

WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

